


Each daggerboard has a dark marking on it at its trailing edge, designating when the bottom of the board is flush with the keel of the hull. This mark must be just above the deck in order for the board not to protrude through the keel. See illustration #16, for a view of a daggerboard properly in plane with the black mark exposed.

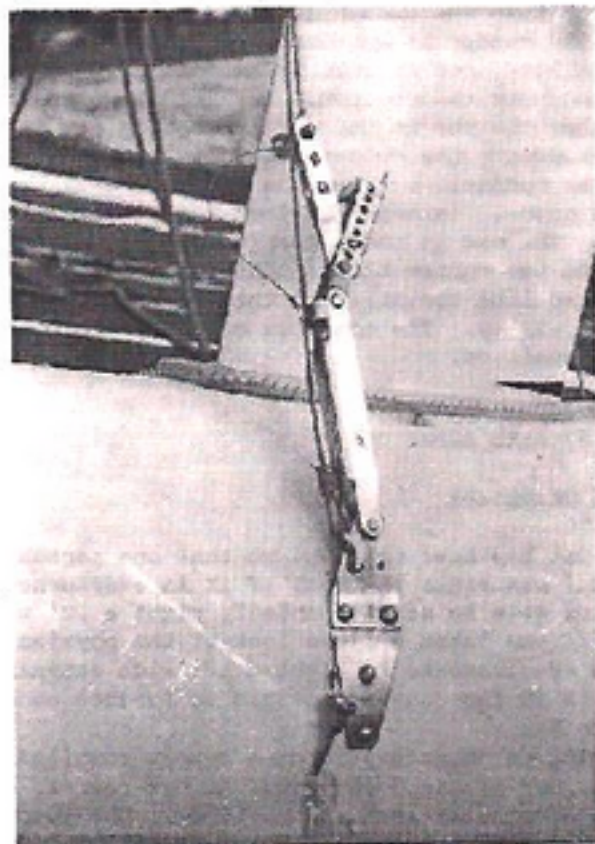

16

TILLER CROSSBAR INSTALLATION

The tiller crossbar has a port and a starboard side to it and each is designated with a "P" and "S", and these designations are located on the end of each side of the crossbar. Insert the proper end into each tiller swivel and secure the crossbar using the provided quick release pins.

RUDDER OPERATION

Super Cat rudders are equipped with a kick up release system, so that one need not worry about harming the rudders in the event of running aground. When the rudders are in the up and locked position, they can be lowered in one of two ways: 1) they can be